

PH. 1,7.3000 equipped with 2DI unit with 2 separable outputs

### Description



Small, lightweight and easy-to-handle, designed for the supply of very high-pressure hydraulic systems, PH1,7 hand pumps are widely used for oil injection disassembly of couplings, hubs and other assemblies.

### Specifications

- Working pressure 1500 to 3000 bar
- Effective tank capacity 1.7 litre
- Machined light alloy pump unit
- One-speed pump
- Braking discharge valve
- External pressure limiter
- Pressure gauge connector
- Stabilisation lug
- 1/2 BSP oil connector (sealing on cone)

### On request

- Quick couplers with protective cap
- Large-diameter pressure gauge
- Stabilisation frame
- Distribution unit for supplying multiple cylinders

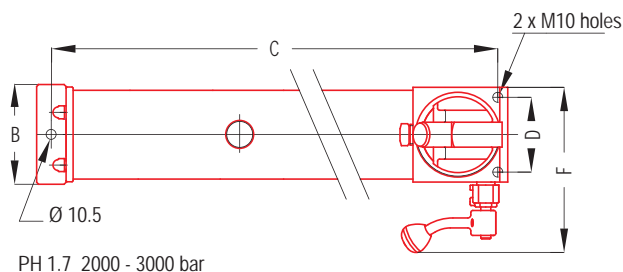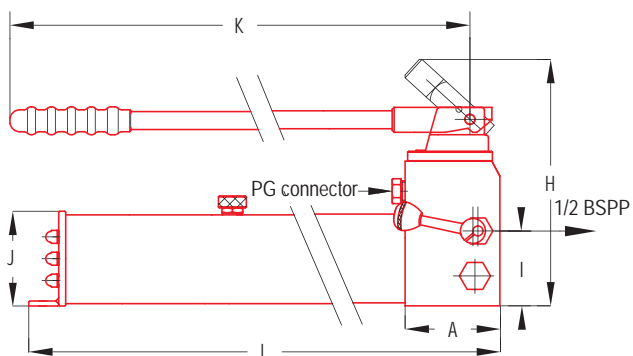

PH 1.7 2000 - 3000 bar

P/N	Mass in Kg	Effective capacity in litres	Dimensions in mm										Flow rate cm <sup>3</sup> per pump activation
			A	B	C	D	F	H	I	J	K	L	
PH.1,7.3000	14,5	1,7	95	100	560	75	165	248	75	95	574	584	0,4