

### Description

The mobile table hydraulic presses in the PM range are designed for major assembly work, disassembling tightened assemblies, straightening parts or any work requiring high loads.

Adaptable on request, in terms of size, power, stroke or distribution, standard presses can serve as a basis for discussions on the definition of your ideal solution.



PM. 14.420 with hydraulic system with portable control box electric control

### Specifications


- Hydraulic press 50 to 220T
- Double-acting cylinder stroke 150 to 420mm
- Mobile table, adjustable height position
- Table movement using cylinder
- Supply via electric motor system
- Manual control valve

### On request

- Different sizes adapted to requirements
- Forward sliding table
- Specific piston end tackle
- Screened protection around press
- Electric distribution, portable control box control
- Cycle automation or semi-automation
- Operation traceability with movement and pressure sensors



PM. 100.250 with electric system with manual control

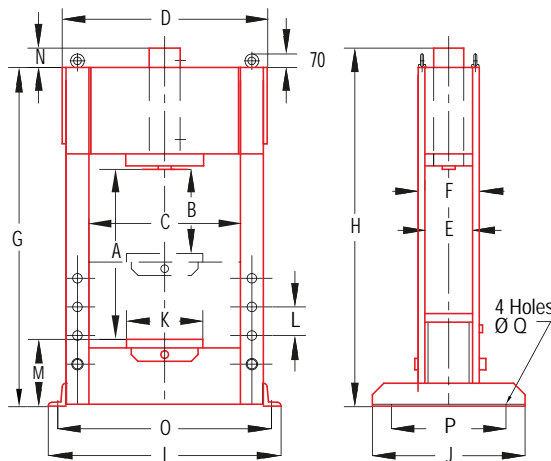

Cat Tonnes	Forces KN	Stroke mm	P/N	Mass kg with cylinders	Dimensions in mm																
					A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
14	137	150	PM 14.150	186	1000	550	510	690	200	230	1435	1530	830	650	300X220	150	220	95	750	600	15
		260	PM 14.260	190	1000	550	510	690	200	230	1435	1640	830	650	300X220	150	220	205	750	600	15
30	309	250	PM 30.250	315	1000	550	510	700	200	250	1465	1655	830	700	300X300	150	240	190	750	600	17
		325	PM 30.325	320	1000	550	510	700	200	250	1465	1730	830	700	300X300	150	240	265	750	600	17
50	496	250	PM 50.250	630	1000	550	800	1050	250	310	1705	1775	1220	700	400X300	150	350	70	1120	600	19
		370	PM 50.370	640	1000	550	800	1050	250	310	1705	1895	1220	700	400X300	150	350	190	1120	600	19
100	1001	250	PM 100.250	1145	1000	550	1000	1280	300	370	1938	2008	1480	900	450X350	150	475	70	1360	700	21
		400	PM 100.400	1175	1000	550	1000	1280	300	370	1938	2078	1480	900	450X350	150	475	140	1360	700	21
150	1496	250	PM 150.250	2048	1300	700	1100	1490	400	480	2435	2505	1680	1000	500X500	200	580	70	1560	800	26
		440	PM 150.440	2095	1300	700	1100	1490	400	480	2435	2535	1680	1000	500X500	200	580	100	1560	800	26
220	2199	250	PM 220.250	3460	1600	850	1300	1780	440	540	2920	2990	1960	1200	600X600	250	685	70	1840	1000	32
		420	PM 220.420	3520	1600	850	1300	1780	440	540	2920	2990	1960	1200	600X600	250	685	70	1840	1000	32