




EB.30.F30.700 with magneto-thermal switch

Specifications

- 3 kW three-phase 220/380V 50 Hz electric motor
- Pressure of 700 bar in continuous operation
- Automatic dual-flow rate pumps:
 - 11L/min in approach mode up to 100 bar
 - 2.2L/min in operation up to 700 bar
- Effective oil capacity 30 to 100 litres
- Adjustable external pressure limiter
- Pressure gauge
- 3/8 NPT outlet oil connector

On request


- Quick couplers with protective caps
- Tanks of different effective capacities
- Specific distribution
- Offset distribution
- Magneto-thermal switch
- Electric cabinet and suspended button-operated unit

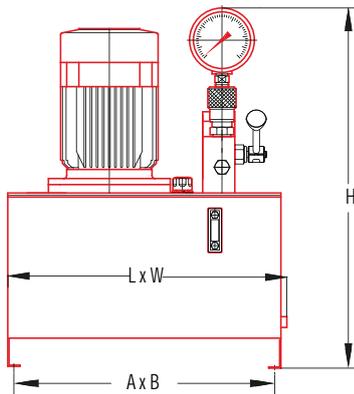


Versions*

- EB.30.U : Single-acting cylinder control, with no load holding
- EB.30.F : Single-acting cylinder control with load holding and braking valve
- EB.30.D : Double-acting cylinder control with integrated indexed manual control valve
- EB.30.SE : Single-acting cylinder control with electro-control valves and suspended button-operated unit
- EB.30.DE : Double-acting cylinder control with electro-control valves and suspended button-operated unit


EB.30.U

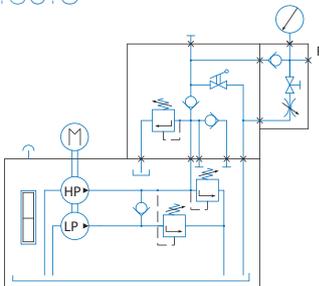

EB.30.F

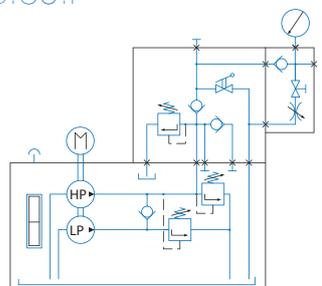

EB.30.D

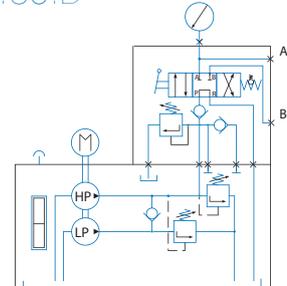

Type	Power in kW	Working pressure in bar	Flow rates l/min		Oil capacity in litres	Size (dimensions in mm)			A X B	Mass in Kg
			Approach (100 b)	Working		Length	Width	Height		
EB.30.*.22.700	3	700	11	2,2	22	555	320	590	500 X 280	85
EB.30.*.50.700	3	700	11	2,2	50	525	465	710	470 X 425	124
EB.30.*.100.700	3	700	11	2,2	100	625	510	860	560 X 480	187